

Strong Grab for Easy Installation

COVE BASE

Construction Adhesive

Titebond® GREENchoice™ Cove Base Construction Adhesive is a professional strength adhesive formulated to provide a fast, strong grab that holds materials firmly in place and eliminates sagging. This VOC-compliant, nonflammable formula is environmentally safe—emitting no harmful fumes and promoting healthy living and working environments.

GREENchoice Water-Based

Environmentally safe

Fast grab

Excellent adhesion

Cleans easily with water
in wet state

Cartridge & carton
contain post-consumer
recycled material

Bonds to all common
wall surfaces

Eliminates sagging

Minimal bracing needed

Impact-resistant

VOC-compliant

Recommended For


Installation of rubber and vinyl cove bases,
as well as stair treads.

Specifications & Certifications

Exceeds ASTM C557.

Compatible Materials

Common wall surfaces including plaster,
drywall, gypsum wallboard, wallpaper, plywood,
hardboard paneling, tileboard, wood, painted
surfaces and concrete.

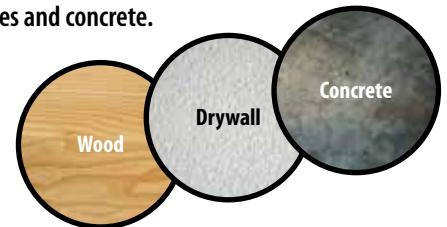

Titebond®
THE PRO'S ADVANTAGE

Ordering/Sku Information

Size	Part Number	UPC	Case UPC	Weight	Units Per Package	Packages Per Pallet
10 Oz. Cartridge	3401	037083034011	10037083034018	12.99 lbs.	12	108
28 Oz. Cartridge	3402	037083034028	10037083034025	34.52 lbs.	12	44
4 Gallon Pail	3404	037083034042	NA	48.95 lbs.	1	36
Quart	3405	037083034059	10037085034054	19.55 lbs.	6	12

Technical Information

- **Application Temperature:**
Over 40°F for adhesive and substrates
- **Service Temperature:** 0°F to 120°F
- **Working Time:** 10-15 Minutes

Physical Properties

- **Type:** Polymer emulsion
- **State:** Medium-viscosity mastic
- **Color:** Beige
- **Solids:** 73%
- **Viscosity:** 145,000 cps
- **pH:** 7.0
- **VOC:** < 50 g/L
- **Weight/Gallon:** 11.5 lbs.
- **Flashpoint:** > 200°F
- **Freeze/Thaw Stability:** Stable
- **Storage Life:**
18 months in an unopened container

User Tips

Not designed for continuous submersion.
For best results, store product above 40°F.

Directions

PREP: Surfaces must be clean and free of any material that may prevent adequate adhesion.

APPLICATION: Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal and place in cartridge gun. Apply continuous parallel beads on the back of the cove base approximately 1" to 1 1/2" apart.

Press cove base firmly and uniformly against the wall within 10-15 minutes of applying adhesive.

Note: Irregular or curved wall surfaces may require bracing until the adhesive has set.

CLEANUP: Tools and adhesive may be cleaned with water while the adhesive is wet. If dried, tools and adhesive may be cleaned with water/acetone/vinegar mixture. Follow solvent vendor's precautions.

Coverage

Size	1/8" bead	1/4" bead	3/8" bead
10 Oz. Cartridge*	129 ft.	30 ft.	14 ft.
28 Oz. Cartridge†	355 ft.	86 ft.	39 ft.

*Approximately 15 linear feet of 4 inch cove base using a double 1/4 inch bead or zigzag pattern

†Approximately 43 linear feet of 4 inch cove base using a double 1/4 inch bead or zigzag pattern



GREENchoice
Water-Based

Visit Titebond.com for the most up-to-date product information.

Franklin International

